



resilience  
E Series



Revolutionary  
in-line salt  
chlorinator for  
pools

**MAGEN**  
ECO-ENERGY




## Resilience E - Natural Salt Chlorinator

### Unique Features:

- Simplest installation in the market
- Designed to work with variable speed pumps
- Bi-directional flow sensor
- Double "low flow" protection
- Full range input voltage 110-220 Vac
- Built in salinity and water temperature sensors
- Replaceable electrolysis cartridge

### Control Panel Display:

- 24 hours super chlorination mode
- Service and maintenance built in alerts
- 4 button operation
- Cell life low LED indicator
- Clean cell identification and alert

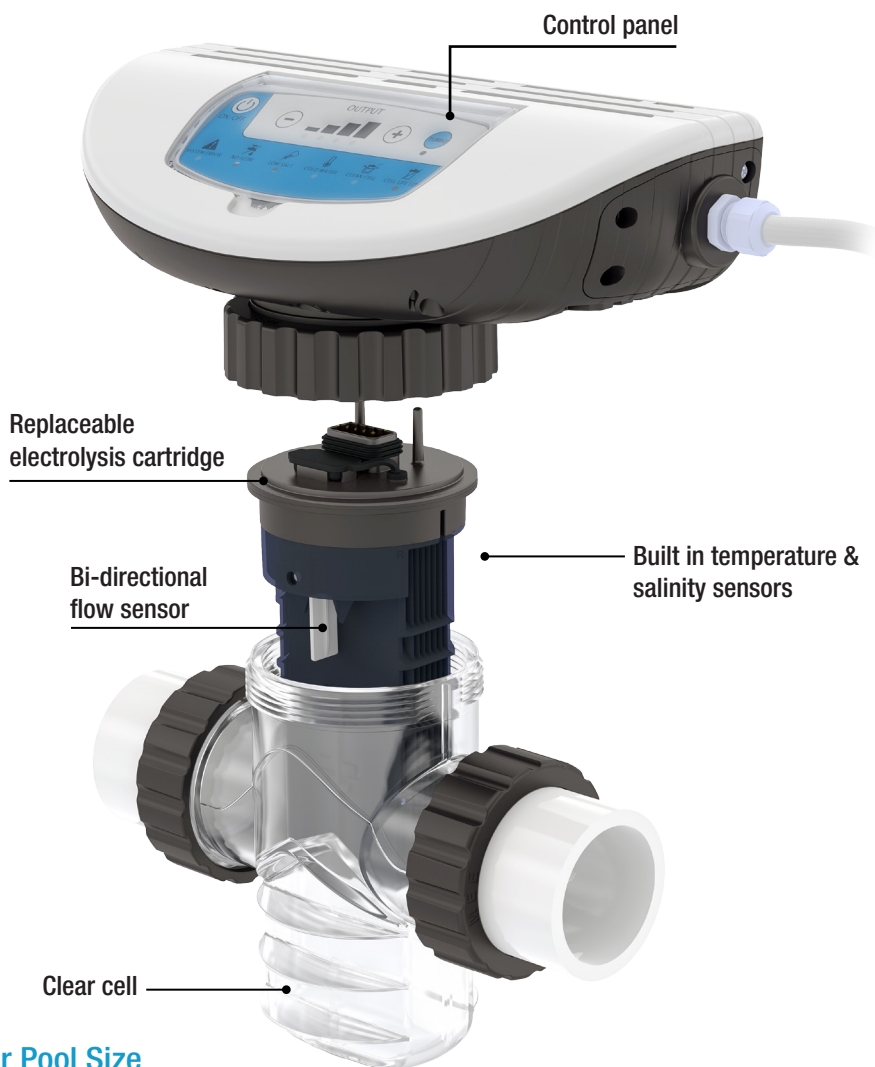

### Choosing the Correct Cell Model for Pool Size

Cell Model	E 18		E 40		E 60	
	Ambient Temperature		Ambient Temperature		Ambient Temperature	
	Less than 26 °C	Above 26 °C	Less than 26 °C	Above 26 °C	Less than 26 °C	Above 26 °C
Maximum pool size in cub. mtrs*	50	60	80	120	120	150
Chlorine Output g/h	14		26		36	

\* Maximum pool size is subjected to using Cyanuric acid to balance pool water.

\* Suitable for private pools!

\* In special pools (Overflow pools, Lap pools, , Hydrotherapy pools, Public/Commercial pools) or in cases of heightened chlorine demand (such as warmer climates, high bathers load, etc.), it is recommended to choose a larger model.

## Standards & Certifications

ISO 9001:2015	International
ISO 14001:2015	International
IP66	International
UL	U.S.A
CE	Europe

January 2018



T +972.8.998.3201 • F +972.8.998.5034 • Kibbutz Magen 8546500, Israel [www.magen-ecoenergypool.com](http://www.magen-ecoenergypool.com)